


COLLAR STYLE SPORTS MUSIC BLUETOOTH EARRBUDS



USER MANUAL

PRODUCT ILLUSTRATION

When the earphone and mobile device is under connecting status ,if did not connect successfully, 15 minutes later the system is default turning off automatically to save power.

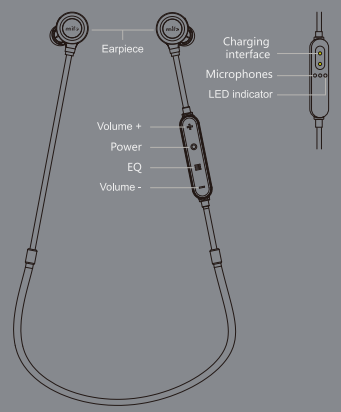

PAIRING

① Pairing with 1 phone or tablet or PC or Notebook and so on:

1. Turn on bluetooth on your phone.
2. Turn on the headset and enter into pairing mode (Blue and Red light LED flash alternately).
3. Connecting

NOTICE: If your mobile phone bluetooth version is below version 2.1, please input password "0000" to enter.

IMPORTANT: If the pairing can't be completed within 90 seconds while the pairing mode is activated, it means the pairing is unsuccessful, please repeat Step1 to Step3 to pair the headset with the bluetooth device again.

PAIRING

② CONNECT WITH TWO BLUETOOTH DEVICES (phones, tablet, PC with bluetooth and so on)

1. Connect with Phone A (Follow ① steps)
2. Turn off the bluetooth function of phone A
3. headset is on pairing mode
4. Turn on the bluetooth function of phone 1 and Connect with Phone A (Follow ① steps)
5. Phone 1 will connect with headset automatically. Otherwise, please click i8 on Phone 1 to connect.

CHARGING

Put the charger to the magnet point so that they can stick together and charge.

LED indicator display status:

- battery low (Red led flash 2 time every 5 second)
- Charging (red light keep on)
- Full charged (blue light keep on)

Please use original POGO PIN USB charging cable or brand charging cable to charge. It will take 1-2 hours to charge fully. Don't use small current power bank to charge, it probably can't charge.

① POWER ON/OFF

Turn on and enter into pairing mode automatically

- Hold Button for 1 second
- Hear a voice "Power on"

Turn the headset off

- Hold Button for 3 seconds
- Hear a voice "Power off"

BUTTON FUNCTION

② ANSWER/HANG UP THE CALLING

X1 Short press power Button once to answer the call when there is calling coming.

X2 Short press power Button once to hang up the calling, when the play is on the calling.

③ REJECTING AN INCOMING CALL

X2 Double click power button to reject a call, when the play is on pause.

④ LAST NUMBER REDIAL

X2 Double click power button to redial the last calling number

Note: Depend on your phone type, the actual operation may vary.

⑤ PAUSE/PLAY

X1 Short press power button once to pause, when the music is on play.

⑥ VOLUME BUTTON

X1 VOL - Click the - button to decrease the voice, click 1 time, decrease 1 grade.

X1 VOL + Click the + button to increase the voice, click 1 time, increase 1 grade.

BUTTON FUNCTION

⑦ ANSWER/REJECTING AN INCOMING CALL

1. When Phone A is on calling, there is calling from phone B: Double-click the power button, hang up the phone B to keep the phone A call.

When Phone A is on calling, there is calling from phone B: Click the power button, hang up the phone A to connect the phone B call.

BUTTON FUNCTION

⑧ Answer/Reject/ Three sides on communications

1. When the phone A is on calling, and phone B there is a coming call. Short press key "Power on", hold on phone A calling and answer Phone B's calling.

2. Under the condition of 1, press key "Power On" to Switch Phone A and Phone B's calling, long press key "Power on" 2 seconds to hang up the calling.

BUTTON FUNCTION

⑨ ADJUST EQ

Short press button "EQ", change EQ from All, eight bass and pitch in circle. (Under the condition of playing music).

⑩ ANSWERING STATUS

When the headset is on calling, short press "EQ" key, it can change the calling from earphone to the phone in circle. (Under the condition of calling)

BUTTON FUNCTION

⑪ PREVIOUS SONG/NEXT

Previous Song: Long press "+" for 2 seconds during music play status

Next Song: Long press "-" for 2 seconds during music play status

⑫ DELETE PAIRED DEVICES FUNCTION

Long Press Key "Power on" and Key "+" 5 seconds at the same time, it can delete the paired device history. After deleted, there is a voice reminding you "disconnected" (It is to solve the problem that when the headset connected with several phone and can not connected with other phones).

⑬ SWITCH CHINESE VOICE TO ENGLISH VOICE

Under pairing mode but not pairing successfully. Short Press "volume +" and "volume -" together to switch Chinese voice to English voice, when operating successfully will prompt "Chinese mode or English mode".

BUTTON FUNCTION

⑭ ONE HEADSET CONNECT WITH TWO MOBILE PHONE COMMUNICATION.

1. Connected with A and B two mobile phones, when both phone have phone calls coming at the same time, short press "ON" button to Answer the calling of phone A.

2. Connected with A and B two mobile phones, when two mobile phones both have phone calls coming, double click "Power on" key to hang up the phone A calling and answer Phone B calling.

BUTTON FUNCTION

3. Connected with A and B two mobile phones, no matter phone calling comes from phone A or phone B, press "Power on" key one second to receive the calling, when the other phone call coming, long press "Power on" key 1 to 2 second to end the present calling and receive the second calling.

4. When there is only one phone call coming, short press Key "Power On" to answer.

HALL SWITCH FUNCTION

1. When playing music: make two earbuds stick together, then stop music.

2. When on the calling: make two earbuds stick together, then hang up the calling.

3. When there is calling coming: take apart two earbuds, then answer the phone call.

FREQUENTLY ASKED QUESTIONS

Why bluetooth headset signal is not stable?

1. Restart the bluetooth headset.
2. Please kindly check the compatibility of the mobile phone and calling communication quality.
3. Then confirm if the distance between headphone and phone is too far or there are interference surrounded.
4. Please don't stay in the signal reflective environment.

Why the bluetooth headphone's noise is so big?

1. Please kindly check the mobile phone's noise suppression function.
2. Please kindly check if the bluetooth headphone and mobile phones distance is too far.
3. Please kindly confirm if there is a electromagnetic radiation surrounding environment.

Why bluetooth headset can't hear voice?

1. Please kindly check if the bluetooth headset is on mute
2. Please check if bluetooth headphone and phone is connected well.
3. Then confirm if the distance between headphone and phone is too far or there are interference surrounded.

MAKE
IT FULLY OPTIMAL

DESIGNED AND MADE BY
Mifo Technology Co., Ltd.

Tel: +86-755-29708800
Fax: +86-755-29708800
Email: mifo@mifo.hk
www.mifo.hk


颈挂式 音乐运动蓝牙耳机



使用指南

产品说明图

耳机未和手机等设备连接状态下,系统默认15分钟后会自动关机以节约电量。

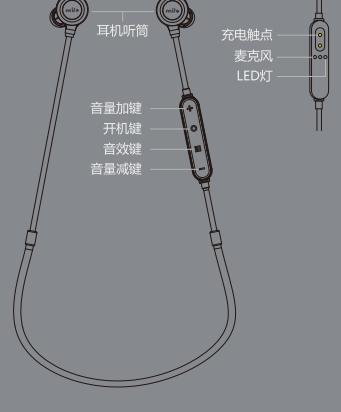

配对

① 单机配对: 可与手机、平板电脑、台式电脑、笔记本等蓝牙的设备配对。

1. 开启手机蓝牙。
2. 长按1秒开机键进入配对模式 (红绿灯交替闪烁)。
3. 搜索mifo-i6进行配对连接 (配对成功后有提示 "蓝牙已连接", 闪光灯变为绿光5秒闪一次)。

提示:

1. 已配对的机器,重新开机或在可搜索范围内,可自动连接,不能连接时,点按开机键或手机打开蓝牙界面,点击配对名称可以回连
2. 如果配对不能在90秒分钟内完成,耳机将进入休眠状态,就表明配对失败,请再根据以上4个步骤重新配对
3. 配对不成功,请删除手机上的配对名,重复配对,直到配对成功

配对

② 蓝牙一拖二功能: 可同时与两台设备连接, 如手机、平板电脑、台式电脑、笔记本等蓝牙的设备配对。

1. 与A手机进行点击配对 (步骤参考单机配对)
2. 关闭A手机的蓝牙设备
3. 与B手机进行点击配对 (步骤参考单机配对)
4. 重新打开A手机的蓝牙设备后与本产品进行点击配对
5. 此时实现一拖二功能 (两台手机都与本产品连接) 配对成功

充电方式

将充电器如图方向对准磁吸触点连接充电器进行充电。

LED指示灯显示状态:

- 电量低 (每两秒红绿灯闪烁2次)
- 充电中 (红绿常亮)
- 电池充满 (绿灯常亮)

本机使用原装充电线进行充电, POGO PIN USB数据线 5V/1A-2A 电源适配器, 5V/1A-2A 车载充电器, 推荐使用2A以下电源适配器给耳机进行充电, 蓝牙耳机充满电量约2小时左右, 不能使用小于100毫安的电源适配器, 车载充电器, 这样会导致不能给耳机充电。

① 开/关机

开机即进入配对模式

长按1秒开机键开机 (关机状态下)

长按3秒开机键关机 (开机任何状态下)

按钮功能

② 接听/挂断电话

X1 来电状态下 单击开机键 接听电话

X2 通话状态下 双击开机键 挂断电话

④ 末位电话重拨

X2 双击开机键 可实现末位号码重拨 (在蓝牙耳机状态下)

⑤ 音乐暂停/播放

X1 单击开机键 可实现播放/暂停功能 (播放音乐状态下)

⑥ 音量- / 音量+

X1 单击+ 音量键 实现音量增大 (在音乐/通话状态下)

X1 单击- 音量键 实现音量减小 (在音乐/通话状态下)

按钮功能

⑦ 接听/拒接电话

1. 当A手机通话, B手机来电, 双击开机键, 拒接B手机来电。

2. 当电话A通话, 电话B来电, 按开机键1s, 挂断电话A通话, 接听电话B来电。

按钮功能

⑧ 接听/拒接/三方通话 (一个耳机连接一台手机)

1. 当电话A通话, 电话B来电, 单击开机键, 保持电话A并接听电话B。

2. 在1这种状态下, 单击开机键可来回切换A/B通话, 长按开机键2s挂断通话电话。

按钮功能

3. 在1这种状态下, 双击开机键挂断保持电话。

⑨ 音效切换模式

单击音效键, 可切换不同音效体验 (在播放音乐状态下)。

⑩ 接听模式

单击音效键, 可实现从耳机转到手机来回互相切换接听。

按钮功能

⑪ 上一曲/下一曲

长按+ 键2秒实现上一曲 (播放音乐状态下)

长按- 键2秒实现下一曲 (播放音乐状态下)

⑫ 清除配对功能

同时长按开机键和音量减5秒, 可清除掉之前所配对过本机蓝牙的手机, 清除成功后会提示 "蓝牙已断开" (此功能为了解决多台手机连接, 导致自己蓝牙耳机连接不上而设定, 在开机未连接状态下操作)

⑬ 中英文切换

开机未配对状态下: 加/减键同时按一下可实现中英文语音切换, 操作成功会提示 "中文模式或 English mode".

按钮功能

⑭ 蓝牙一拖二通话

1. A/B两台手机同时连接成功后, 连接的两台手机同时来电, 短按开机键一下始终接听A手机来电电话。

2. A/B两台手机同时连接成功后, 两台手机同时有来电时, 双击开机键挂断A来电, B等待接听。

按钮功能

3. A/B两台手机同时连接成功后, A/B任何一方手机来电, 接听后, 另外一台手机来电, 长按开机键1-2秒挂断当时通话, 接听另一台手机来电。

4. 只有一个电话来电时, 单击开机键一下接听即可。

霍尔开关功能

1. 在播放蓝牙音乐状态下, 左右耳机磁吸合起来可停止音乐。

2. 在通话状态下, 左右耳机磁吸合起来可挂断电话。

3. 在来电状态下, 左右耳机磁吸分开可接听电话。

常见问题

蓝牙耳机不开机?

- ① 需长按开机键1秒钟左右才会开机;
- ② 检查蓝牙耳机是否没电, 需进行充电。

蓝牙耳机信号不稳定?

- ① 重新启动蓝牙耳机;
- ② 查看手机的兼容性及手机通话质量;
- ③ 确认是否距离过远或者周边环境有干扰;
- ④ 不要停留在信号反射的环境中。

蓝牙耳机噪音过大?

- ① 查看手机的音量是否为静音;
- ② 确认蓝牙是否与手机距离过远;
- ③ 确认周边环境是否有电磁辐射。

蓝牙耳机听不到声音?

- ① 检查耳机音量是否为静音;
- ② 检查蓝牙耳机是否与手机连接;
- ③ 检查蓝牙耳机是否与手机距离过远或周边有干扰物体。



您可以随时加入官方交流群, 获取产品资讯!

深圳市米福电子有限公司 (深圳)
官方微信: MIF0 0800-7630
服务热线: 400-000-7630